


5. Childproof Lid

Fit the childproof lid.

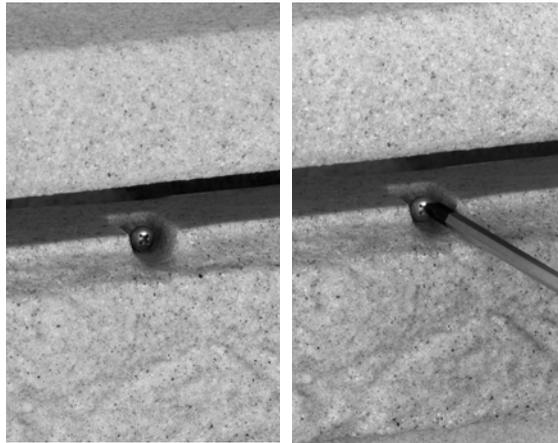

It is possible to connect two tanks together. Please use the 3P Connection Set 250 mm Art.-No. 9000326.

Water Butt Instruction Sheet 3P Maurano 300 L




We recommend using the 3P Filter Collector Universal to fill the Maurano.

Where the water butt cannot be located within 30 cm of the down pipe, longer Universal Long Link Kits are available online (Art. No. 9000123U, U2, to U5).

If in any doubt during installation, please consult a professional tradesman.





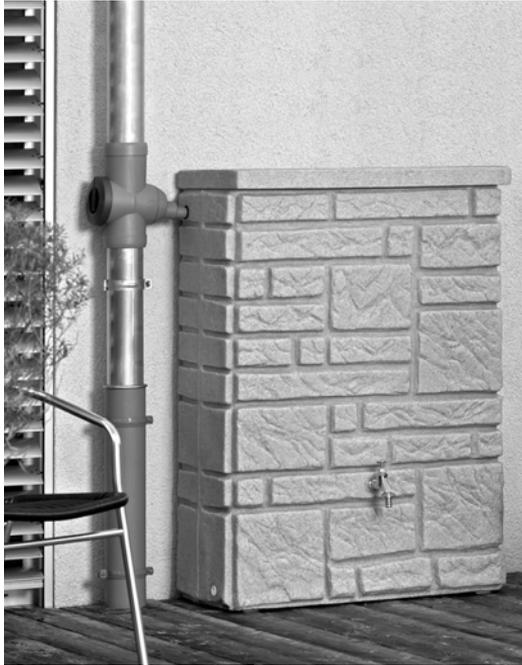

1. Setting up
 Site the rain tank on a firm, level surface adjacent to a downpipe.

2. Connection to the downpipe
 Locate the area to form a hole for connecting the downpipe filter or diverter. Use the hole saw set. Take care to select the right size saw.

Choose Ø 32 mm of the hole saw for 32 connection or Ø 58 mm for a connection 50 mm. Refer to the instructions for your selected down pipe filter.

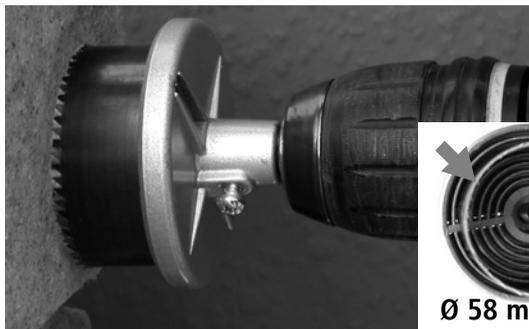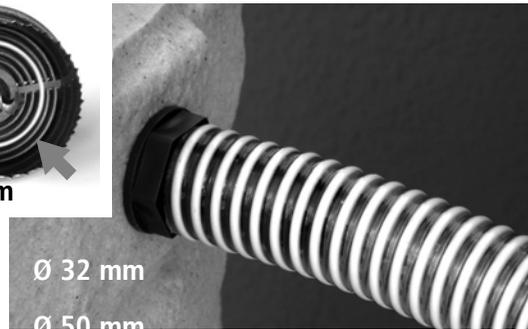

3. Collecting water
 There is a 3/4" BSP thread 30 cm above tank base to connect a tap or other 3/4" fitting.

4. Base Threads & Winter Care Precautions
 To prevent any damage from being caused, the Maurano must be drained completely and disconnected from the rainwater inlet during freezing weather conditions.

The base threads can also be used to connect pumps or other tanks to the Maurano.